



ELI

Autotransporter with overrun brake



Standard equipment

- | | |
|--|------------------------------|
| · Overrun/parking brake | · Manual winch |
| · Wedge for blocking wheels of the car trailer | · Support wheel |
| · LED lighting | · Aluminum ramps slide 2,5 m |



Optional equipment

- | | |
|---------------------------------------|------------------------------|
| · Powder coated elements | · Axle shock absorbers |
| · Manual winch AL-KO | · Automatic support wheel |
| · Aluminum floor filling | · Aluminium side |
| · Aluminium rims | · Locking wedges, set |
| · LED lamps with dynamic turn signals | · Spare wheel with mountings |

Follows
your lead



Specification							
Series	Cargo dimensions [mm]	External dimensions (L x W x H) [mm]	PMW [kg]	Tare weight [kg]	Max cargo capacity [kg]	Type of wheels	Quantity axis
ELI 2740 ELI 3040 ELI 3540	4000 x 2160	5600 x 2160 x 625*	2700	660	2040	R10*/R13	2
		5600 x 2160 x 670	3000	665	2335	R10*/R13	
			3500	740	2760	R13	
ELI 2745 ELI 3045 ELI 3545	4500 x 2160	6100 x 2160 x 625*	2700	690	2010	R10*/R13	2
		6100 x 2160 x 670	3000	695	2305	R10*/R13	
			3500	770	2730	R13	
ELI 2750 ELI 3050 ELI 3550	5000 x 2160	6600 x 2160 x 625*	2700	720	1980	R10*/R13	2
		6600 x 2160 x 670	3000	725	2275	R10*/R13	
			3500	800	2700	R13	
ELI 2755 ELI 3055 ELI 3555	5500 x 2160	7100 x 2160 x 625*	2700	750	1950	R10*/R13	2
		7100 x 2160 x 670	3000	755	2245	R10*/R13	
			3500	830	2670	R13	

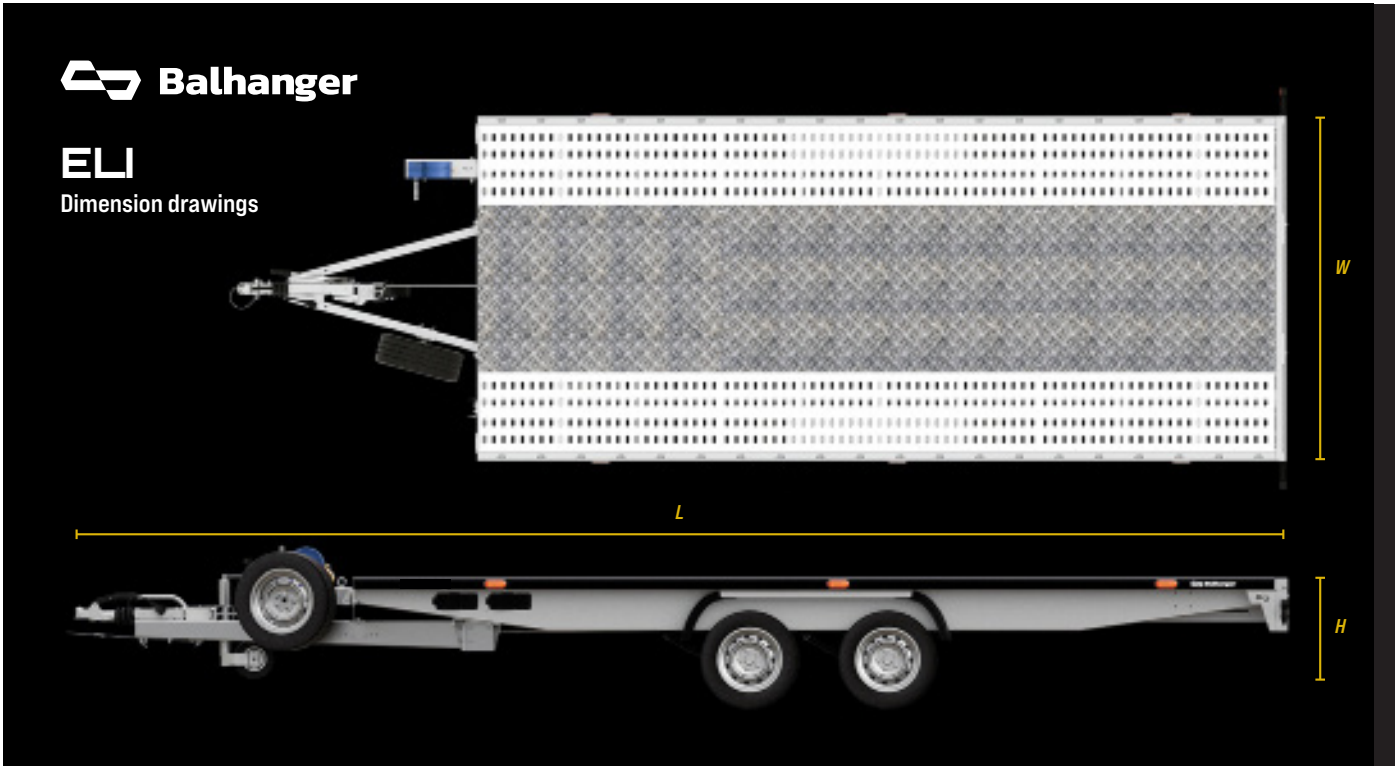

www.balhanger.com
balhanger@balhanger.com