



LOGI

Cargo trailer with overrun brake



Standard equipment

- | | |
|--|------------------------------|
| · Overrun/parking brake | · Waterproof floor plywood |
| · Wedge for blocking wheels of the car trailer | · Manual winch |
| · Support wheel | · Load securing holders |
| · LED lighting | · Aluminum ramps slide 2,5 m |



Optional equipment

- | | |
|---------------------------------------|---------------------------|
| · Powder coated elements | · Axle shock absorbers |
| · AL-KO manual winch | · Automatic support wheel |
| · Spare wheel with holder | · Aluminium side |
| · LED lamps with dynamic turn signals | · Removable railings |

Follows
your lead



Specification							
Series	Cargo dimensions [mm]	External dimensions (L x W x H) [mm]	PMW [kg]	Tare weight [kg]	Max cargo capacity [kg]	Type of wheels	Quantity axis
LOGI 2740 LOGI 3040 LOGI 3540	4000 x 2160	5600 x 2160 x 625	2700	702	1998	R10/R13	2
		5600 x 2160 x 670	3000	707	2293	R10/R13	
			3500	782	2718	R13	
LOGI 2745 LOGI 3045 LOGI 3545	4500 x 2160	6100 x 2160 x 625	2700	738	1962	R10/R13	2
		6100 x 2160 x 670	3000	743	2257	R10/R13	
			3500	818	2682	R13	
LOGI 2750 LOGI 3050 LOGI 3550	5000 x 2160	6600 x 2160 x 625	2700	774	1926	R10/R13	2
		6600 x 2160 x 670	3000	779	2221	R10/R13	
			3500	854	2646	R13	
LOGI 2755 LOGI 3055 LOGI 3555	5500 x 2160	7100 x 2160 x 625	2700	809	1891	R10/R13	2
		7100 x 2160 x 670	3000	814	2186	R10/R13	
			3500	889	2611	R13	

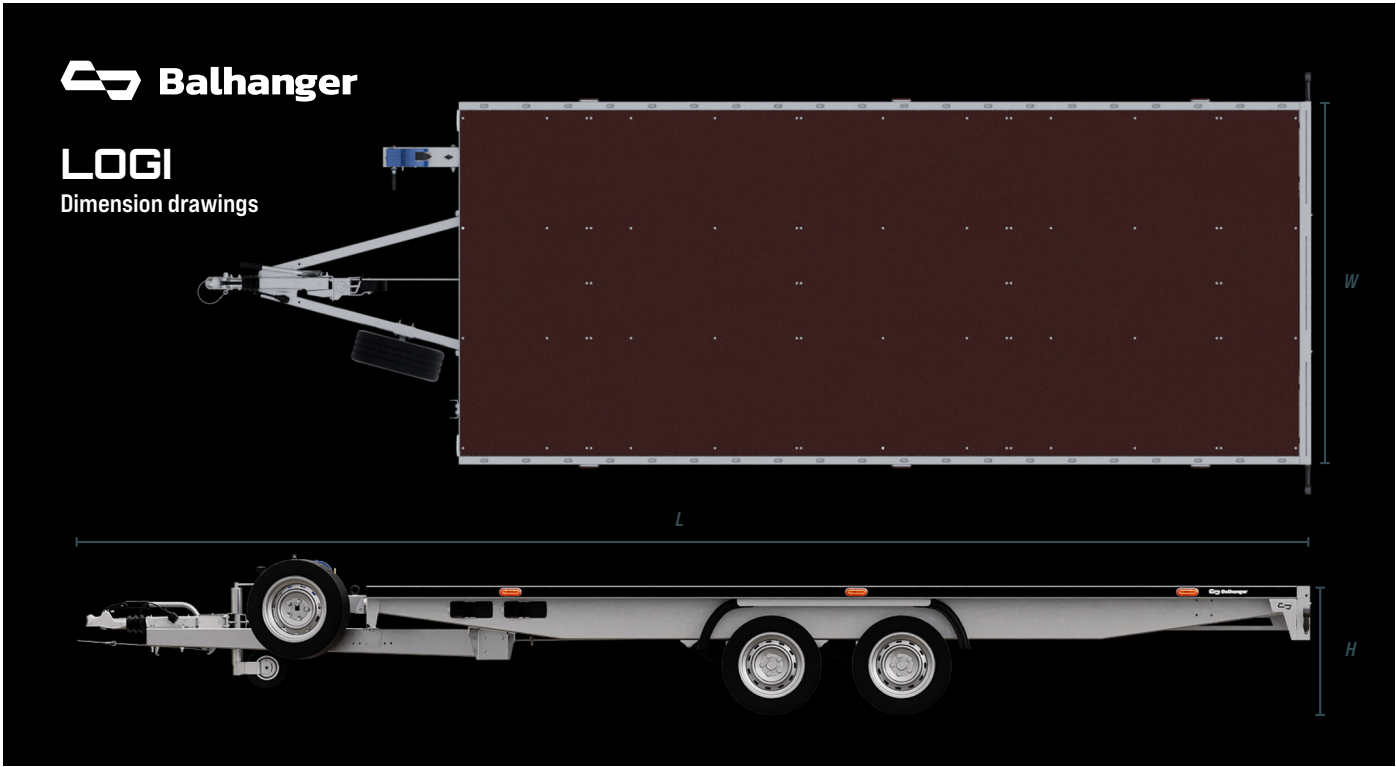

www.balhanger.com
balhanger@balhanger.com