



OPTI - 45

Trailer with overrun brake



Standard equipment

- | | |
|--|--------------------------------------|
| · Overrun/parking brake | · Manual winch |
| · Wedge for blocking wheels of the car trailer | · Actuators for tilting the platform |
| · Support wheel | · LED lighting |
| · Aluminum ramps slide 1,5 m | |

Optional equipment


- | | |
|---------------------------------------|--------------------------------|
| · Powder coated elements | · Axle shock absorbers |
| · Koło zapasowe z mocowaniem | · Manual winch AL-KO |
| · Single-acting hydraulic pump | · Double-acting hydraulic pump |
| · Automatic support wheel | · Aluminum floor filling |
| · Aluminium side | · Aluminium rims |
| · LED lamps with dynamic turn signals | · Aluminum ramps slide 2 m |

Follow your lead



Specification

Series	Cargo dimensions [mm]	External dimensions (L x W x H) [mm]	PMW [kg]	Tare weight [kg]	Max cargo capacity [kg]	Type of wheels	Load angle
OPTI 2745 OPTI 3045 OPTI 3545	4500 x 2160	6125 x 2160 x 630	2700	695	2005	R10/R13	8°/9°
3000			710	2290	R10/R13	8°/9°	
3500			785	2715	R13	10°	
OPTI 2750 OPTI 3050 OPTI 3550	5000 x 2160	6625 x 2160 x 630	2700	725	1975	R10/R13	7,5°/8,5°
3000			740	2260	R10/R13	7,5°/8,5°	
3500			815	2685	R13	9°	
OPTI 2755 OPTI 3055 OPTI 3555	5500 x 2160	7125 x 2160 x 630	2700	760	1940	R10/R13	7°/8°
3000			775	2225	R10/R13	7°/8°	
3500			855	2645	R13	8,5°	

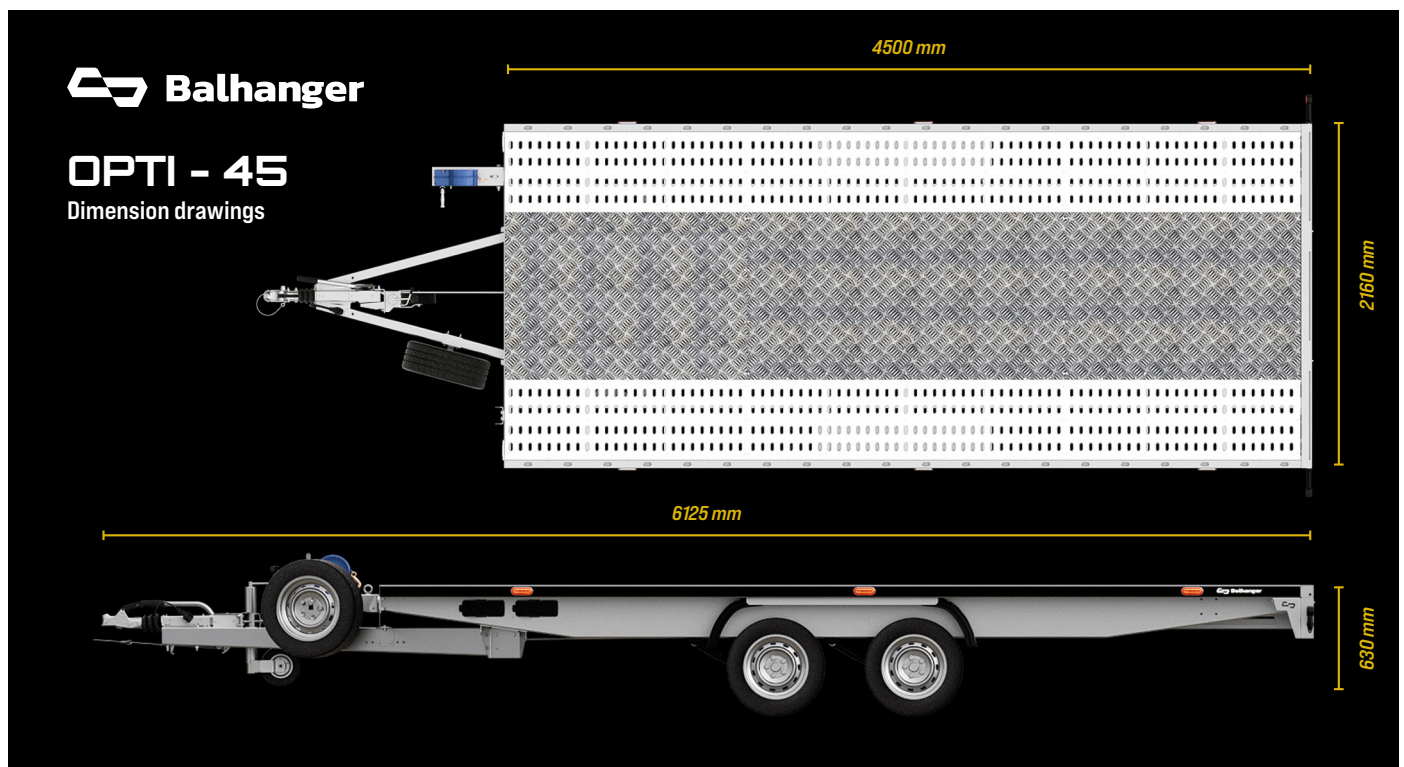

www.balhanger.com
balhanger@balhanger.com