



LOGI +

Cargo trailer with overrun brake



Standard equipment

- | | |
|--|-------------------------|
| · Overrun/parking brake | · Aluminium side |
| · Wedge for blocking wheels of the car trailer | · Load securing holders |
| · Support wheel | · LED lighting |
| · Waterproof floor plywood | |



Optional equipment

- | | |
|---------------------------------------|------------------------|
| · Powder coated elements | · Axle shock absorbers |
| · Spare wheel with holder | · Manual winch |
| · Automatic support wheel | · Tarpaulin |
| · Aluminum ramps slide 2,5 m | · Aluminium rims |
| · LED lamps with dynamic turn signals | |

Follows your lead



Specification							
Series	Cargo dimensions [mm]	External dimensions [L x W x H] [mm]	PMW [kg]	Tare weight [kg]	Max cargo capacity [kg]	Type of wheels	Quantity axis
LOGI+ 2740	4000 x 2160	5600 x 2160 x 625	2700	780	1920	R10/R13	2
LOGI+ 3040		5600 x 2160 x 670	3000	785	2215	R10/R13	
LOGI+ 3540			3500	860	2640	R13	
LOGI+ 2745	4500 x 2160	6100 x 2160 x 625	2700	820	1880	R10/R13	2
LOGI+ 3045		6100 x 2160 x 670	3000	825	2175	R10/R13	
LOGI+ 3545			3500	900	2600	R13	
LOGI+ 2750	5000 x 2160	6600 x 2160 x 625	2700	859	1841	R10/R13	2
LOGI+ 3050		6600 x 2160 x 670	3000	864	2136	R10/R13	
LOGI+ 3550			3500	939	2561	R13	
LOGI+ 2755	5500 x 2160	7100 x 2160 x 625	2700	899	1801	R10/R13	2
LOGI+ 3055		7100 x 2160 x 670	3000	904	2096	R10/R13	
LOGI+ 3555			3500	979	2521	R13	

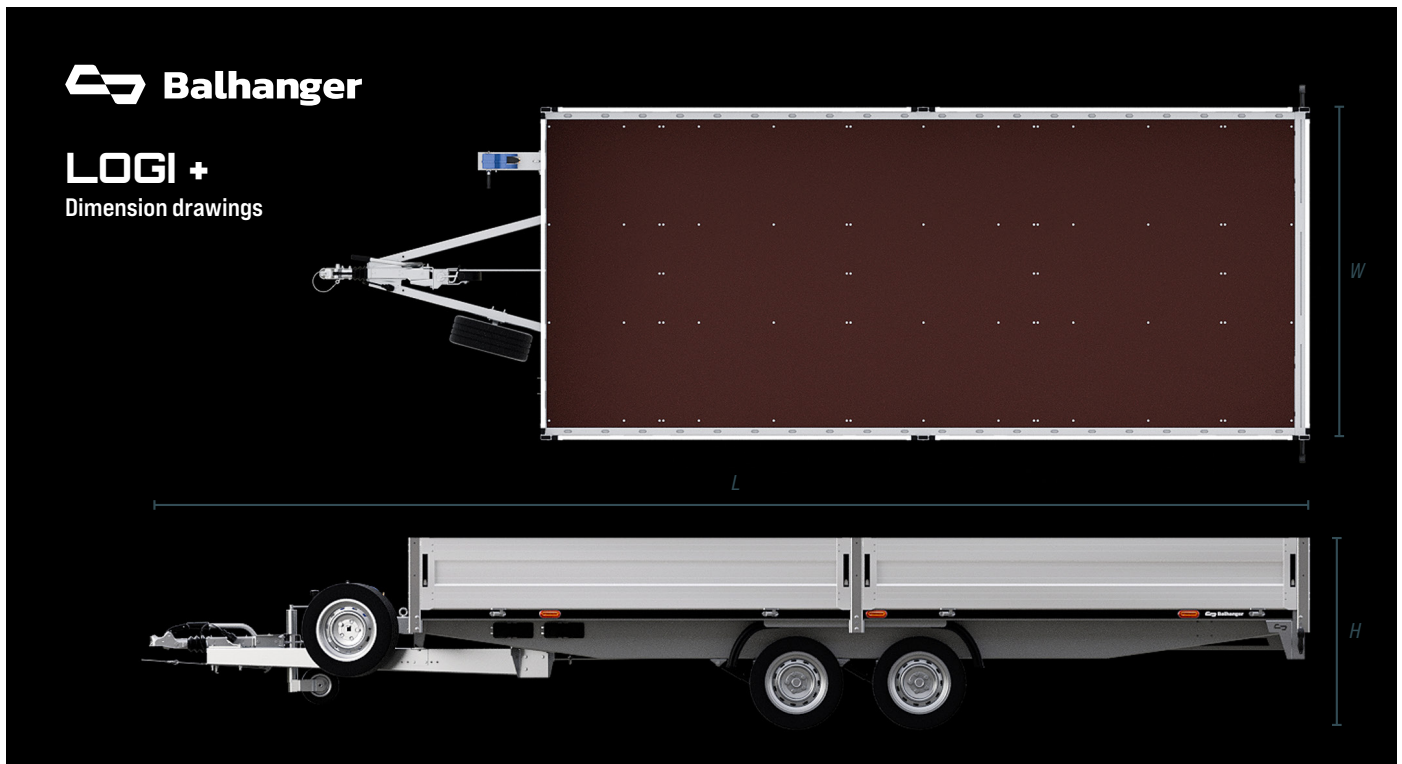

www.balhanger.com
balhanger@balhanger.com