




OPTILIFT

Trailer with overrun brake

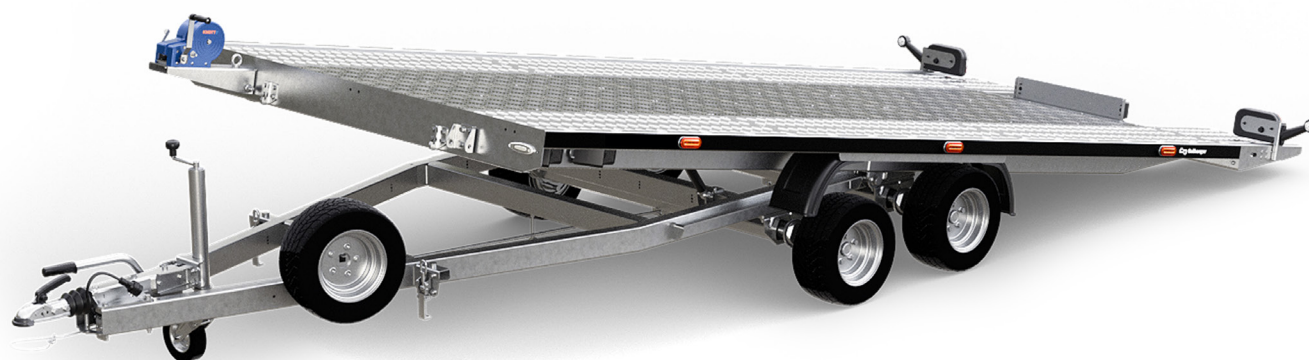

Standard equipment

- | | |
|--|--------------------------------------|
| · Overrun/parking brake | · Manual winch |
| · Wedge for blocking wheels of the car trailer | · Actuators for tilting the platform |
| · Support wheel | · LED lighting |



Optional equipment

- | | |
|--------------------------------|--------------------------------|
| · Powder coated elements | · Axle shock absorbers |
| · Spare wheel with mountings | · Manual winch AL-KO |
| · Single-acting hydraulic pump | · Double-acting hydraulic pump |
| · Automatic support wheel | · Aluminum floor filling |
| · Aluminium rims | · Locking wedges, set |

Follows
your lead



Specification							
Series	Cargo dimensions [mm]	External dimensions (L x W x H) [mm]	PMW [kg]	Tare weight [kg]	Max cargo capacity [kg]	Type of wheels	Load angle
OPTILIFT 2745	4500 x 2160	6575 x 2160 x 630	2700	665	2045	R10/R13	12° /13°
OPTILIFT 3045			3000	685	2315	R10/R13	12° /13°
OPTILIFT 3545			3500	760	2740	R13	13°
OPTILIFT 2750	5000 x 2160	7075 x 2160 x 630	2700	705	1995	R10/R13	11,5° /12°
OPTILIFT 3050			3000	720	2280	R10/R13	11,5° /12°
OPTILIFT 3550			3500	795	2705	R13	12°
OPTILIFT 2755	5500 x 2160	7575 x 2160 x 630	2700	745	1955	R10/R13	10° /11°
OPTILIFT 3055			3000	760	2240	R10/R13	10° /11°
OPTILIFT 3555			3500	835	2665	R13	11°

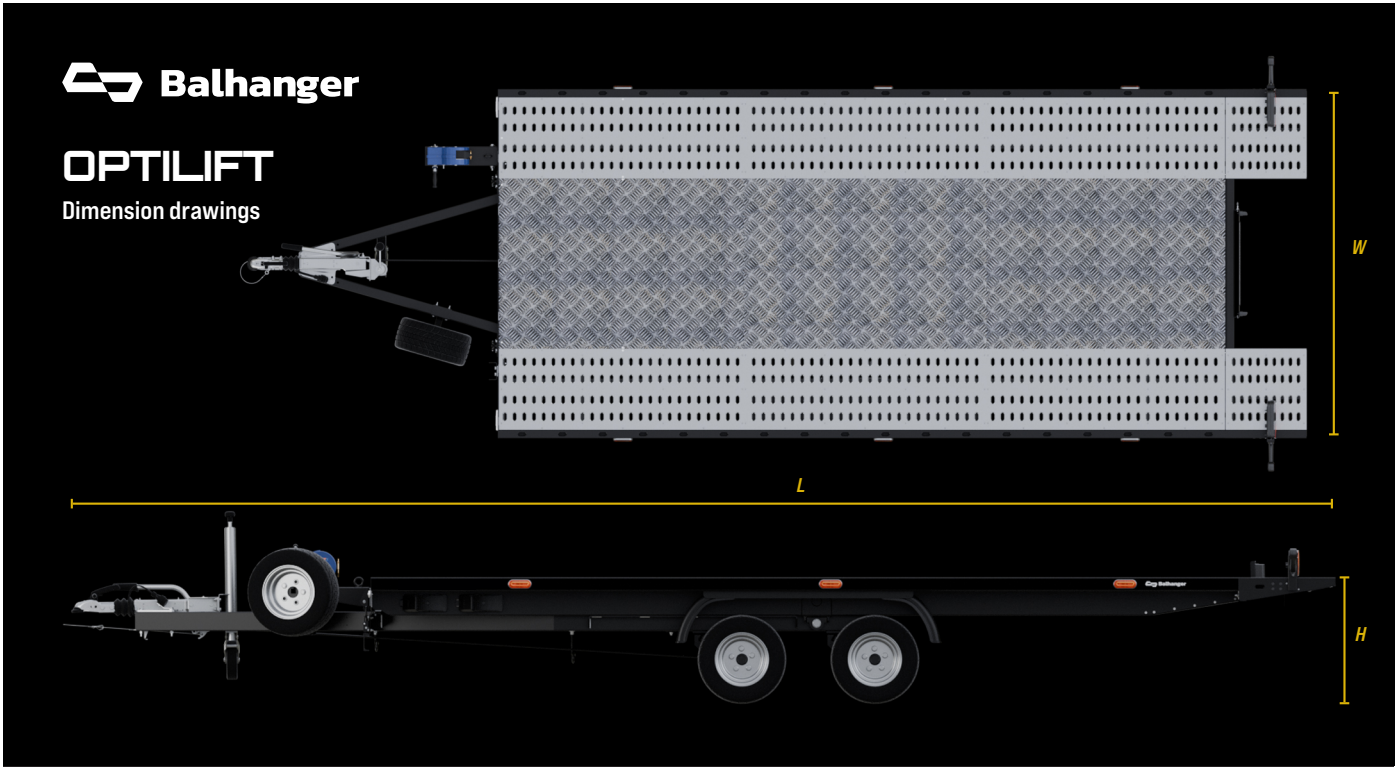

www.balhanger.com
balhanger@balhanger.com