



TRIMAX

Autotransporter with overrun brake



Standard equipment

- | | |
|--|--------------------------------|
| · Overrun/parking brake | · Manual winch |
| · Wedge for blocking wheels of the car trailer | · Single-acting hydraulic pump |
| · Support wheel | · LED lighting |
| · Aluminum ramps slide 1,5 m | · Axle shock absorbers |



Optional equipment

- | | |
|---------------------------------------|--------------------------------|
| · Powder coated elements | · Manual winch AL-KO |
| · Spare wheel with mountings | · Double-acting hydraulic pump |
| · Automatic support wheel | · Aluminum floor filling |
| · Aluminium side | · Aluminium rims |
| · Aluminum ramps slide 2 m | · Locking wedges, set |
| · LED lamps with dynamic turn signals | |

Follows
your lead



Specification							
Series	Cargo dimensions [mm]	External dimensions (L x W x H) [mm]	PMW [kg]	Tare weight [kg]	Max cargo capacity [kg]	Type of wheels	Load angle
TRIMAX 3060	5000 x 2160	6640 x 2160 x 618	3500	890	2610	R10	7°
TRIMAX 3555	5500 x 2160	7140 x 2160 x 618	3500	920	2580		
TRIMAX 3560	6000 x 2160	7640 x 2160 x 618	3500	960	2540		

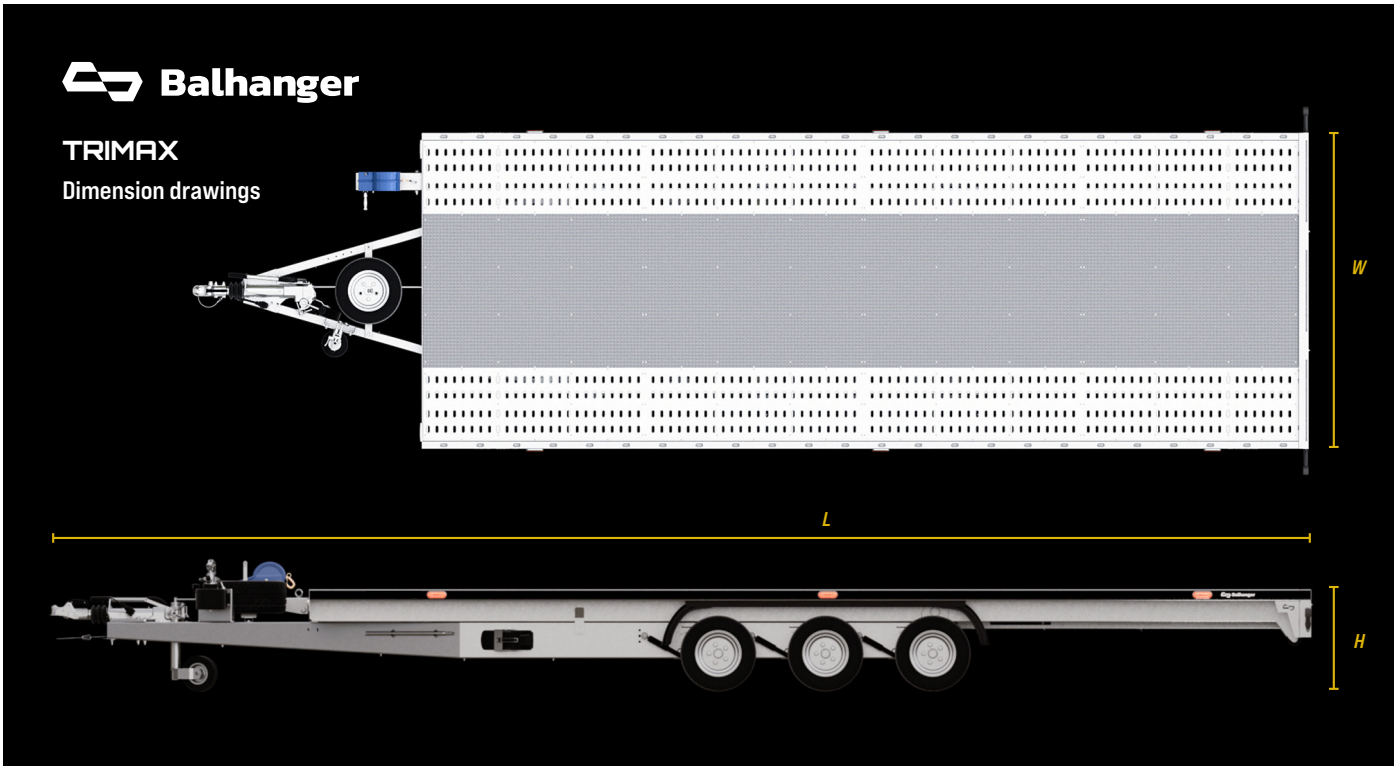

www.balhanger.com
balhanger@balhanger.com